


SPECIFICATIONS FOR THERMO CONTEMPORARY DOUBLE-SIDED BUILD-IN FIREPLACES

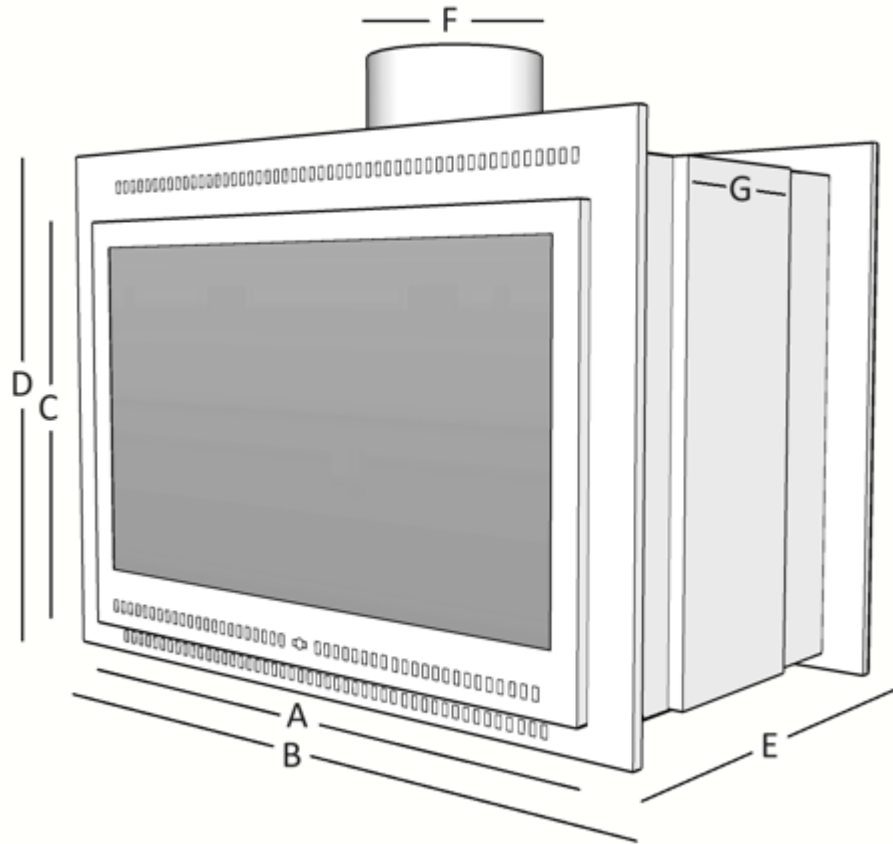

PRODUCT	A=FP width	B=Facade	C=FP height	D=facade	E=FP depth	F=Flue	G=Lintels
MEASUREMENTS GIVEN IN MILLIMETRE							
600	600 mm	740	640	712	620	230 Ø	175
700	700 mm	840	640	712	620	250 Ø	165
850	850 mm	990	640	712	620	300 Ø	140
1050	1050 mm	1190	750	822	650	350 Ø	130
1200	1200 mm	1340	750	822	700	380 Ø	140
1500	1500 mm	1640	750	822	700	400 Ø	130

The Façade has laser cut vents for convection and is standard with a 20mm return façade.
Also available with “flatbar” façade if preferred – in which case the lintol will be 20 mm wider per side.