


Specifications For Thermo Contemporary Build-In Fireplaces

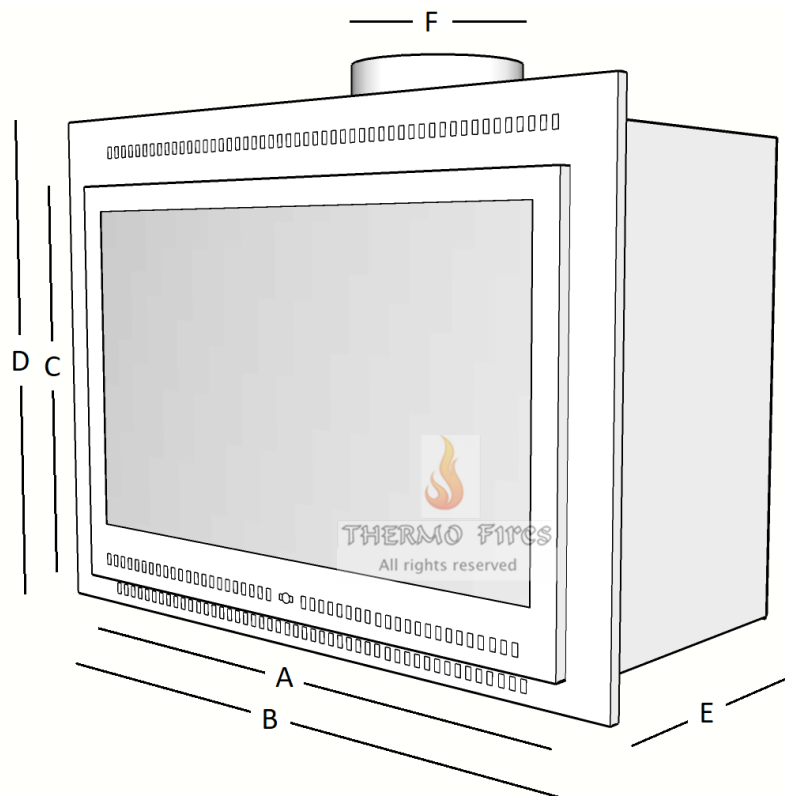

PRODUCT	A=FP width	B=Facade	C=FP height	D=facade	E=FP depth	F=Flue	G=Lintel
MEASUREMENTS GIVEN IN MILLIMETRE							
500	500 mm	640	540	612	450	200 Ø	130
600	600 mm	740	640	712	500	200 Ø	180
700	700 mm	840	640	712	500	230 Ø	150
850	850 mm	990	640	712	500	250 Ø	130
1050	1050 mm	1190	750	822	550	300 Ø	130
1200	1200 mm	1340	750	822	600	350 Ø	130
1500	1500 mm	1640	750	822	650	380 Ø	150
1800	1800 mm	1940	750	822	750	450 Ø	180

The Façade has laser cut vents for convection and comes standard with a 20mm return façade. Also available with a "flatbar" façade if preferred – in which case the lintol will be 20 mm wider.